


Crockmeter Rubbing Fastness Tester

To determine colorfastness of textile to dry or wet rubbing, fitted with hand crank/counter. Provided with a steel specimen holder and 16 mm diameter test finger.

Applies 1134 grams of pressure on a 16 mm finger and rotate 1.125 turns clockwise then anti-clockwise. The operating handle turns in one direction only.

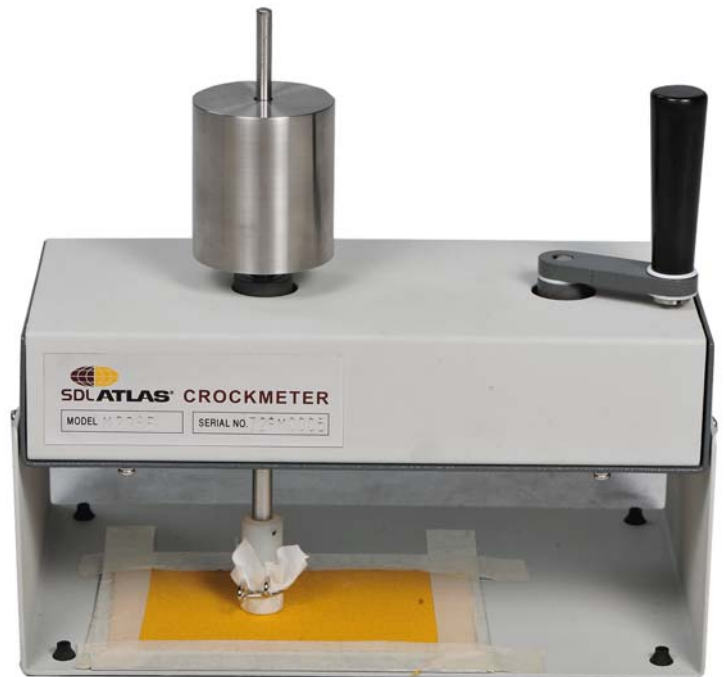

Standards:

- AATCC 116
- GB 29865
- ISO 105-X16

Crockmeter Size

Width	Depth	Height	Weight
250 mm	150 mm	250 mm	5.5 kg

Ordering Information

M238E	Rotary Crockmeter
301058	Pre-cut Crocking Cloths, 50 x 50 mm (pack of 500) AATCC/ISO Standard
201185	Pre-Cut Crocking Cloths, 50 x 50 mm (pack of 500) SDC
103871	Crockmeter Calibration Fabric (pack of 25)
103872	Emery Paper for Crockmeter (Pack of 25 sheets)
201194	Grey Scale (Staining) ISO/BS Standards
202161	Grey Scale (Staining) AATCC Standards



SDL ATLAS LLC
3934 Airway Drive
Rock Hill, SC 29732-9200, USA
Telephone: +1 803 329 2110
Facsimile: +1 803 329 2133
Website: www.sdlatlas.com

SDL ATLAS LTD.
1/F (South-East) & 2F, Shenjian Mansion,
Central District (West), Hi-Tech Park,
Nanshan, Shenzhen, 518057, P.R.C.
Telephone: +86 (755) 2671 1168
Facsimile: +86 (755) 2671 1337
Website: www.sdlatlas.com

SDL ATLAS LTD.
3J, Garment Centre, 576 Castle Peak Road,
Kowloon, Hong Kong.
Telephone: (852) 3443 4888
Facsimile: (852) 3443 4999
Website: www.sdlatlas.com